


Double rotary with flange 25MPa

model WRA□□




Double rotary type combines two rotaries on same axis to keep the overall height lower still. Two types are available with 12 or 16 circuits, and each circuit can be used independently.

Rotary 1 and Rotary 2 rotate independently but they can be synchronized by using a joint pin (included).

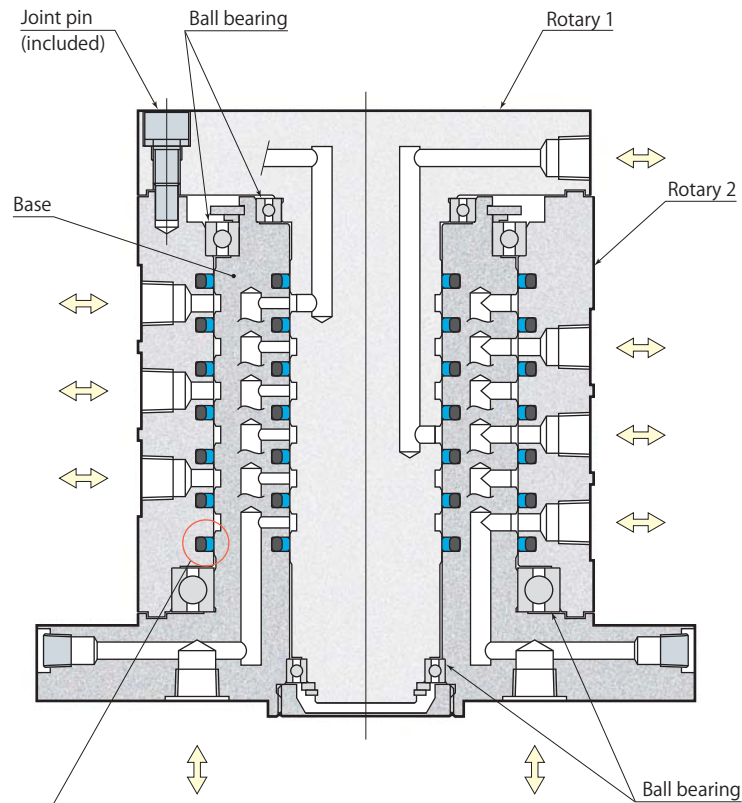



Sliding surface of seal
 • Polishing
 • Hard chrome plating
 • Super-finish



Sliding surface is polished, hard chrome plated and then super-finished to offer superior seal performance and durability.

Specifications

Model		WRA66	WRA88
Number of circuits		12 circuits	16 circuits
Orifice area	mm ²	A-F port : 8.6 G-L port : 20.4	A-H port : 8.6 I-P port : 20.4
Fluid used		General mineral based hydraulic oil (ISO-VG32 equivalent) or air	
Max. pressure	MPa	25	
Allowable rotations		Varies depending on fluid pressure (refer to page → 216 for details on allowable rotations.)	
Operating temperature	°C	0-70	
Piping port size		Rc1/4	
Mass	kg	22	30

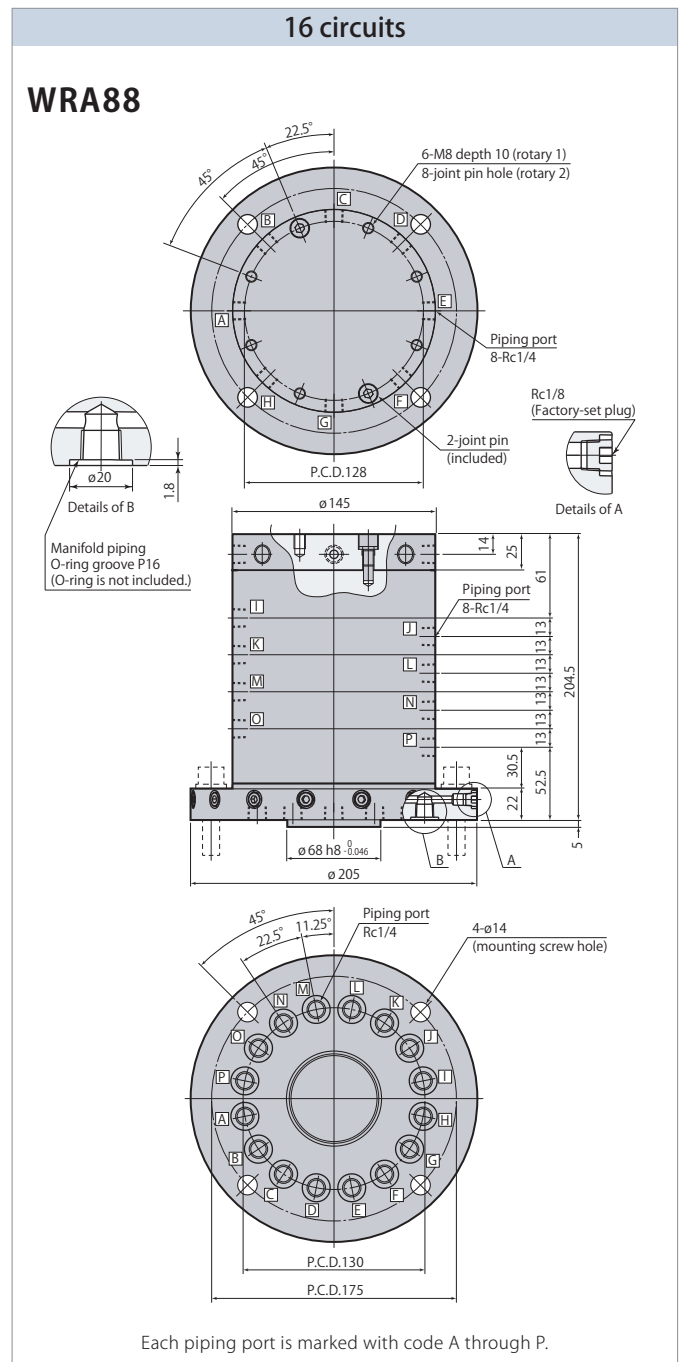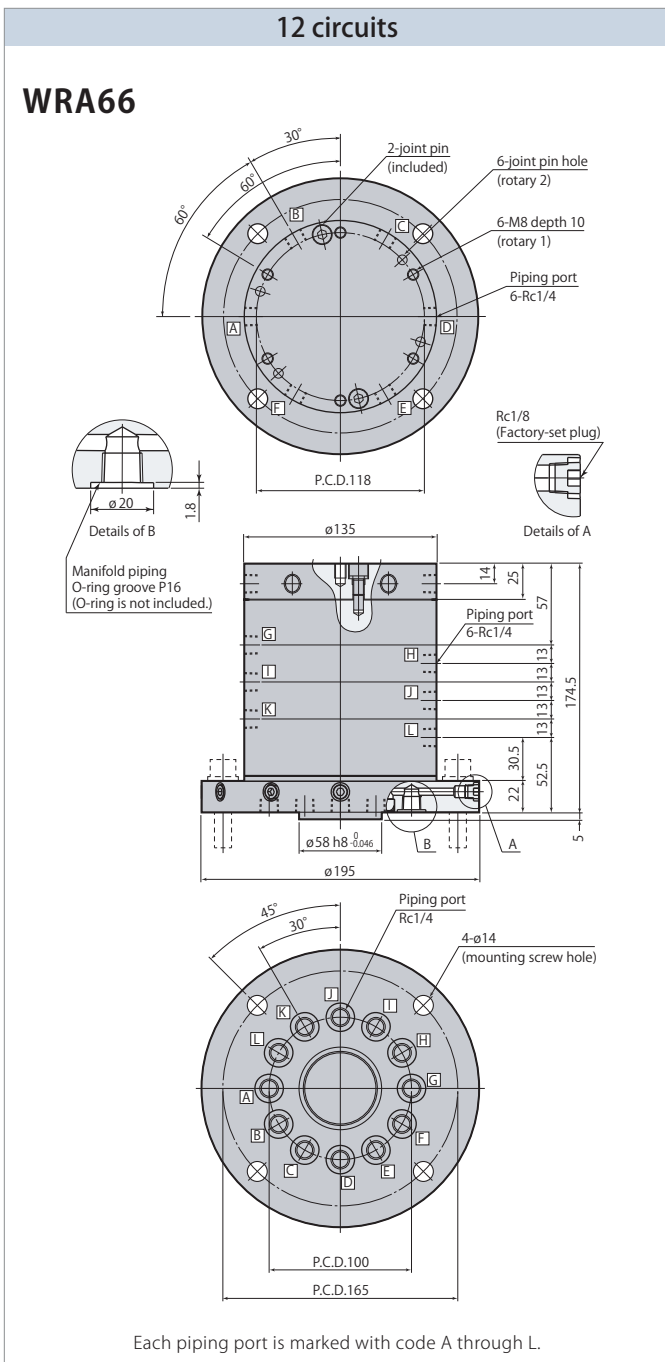

● Mounting screws are not included.